



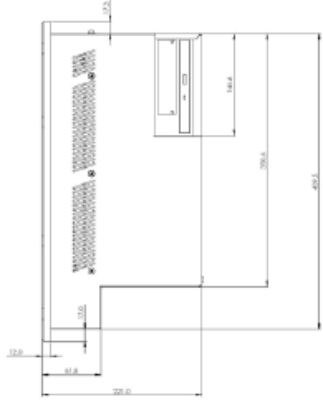

# ET45190

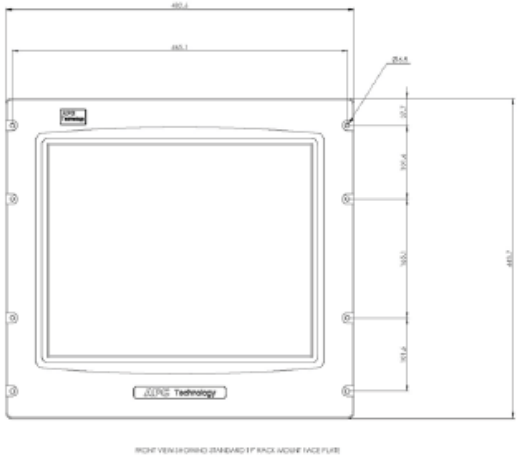

### SPECIFICATIONS

Construction: Aluminium  
 CPU Support: Pentium M / Celeron M  
 Memory: 512MB standard, Up to 2GB  
 Storage: 2.5" HDD  
 I/O: Serial ports  
 LAN port  
 Parallel port  
 USB ports  
 Power: AC power supply  
 Operating Power Consumption 125W

### Display:

Size: 19"  
 Type: LCD TFT  
 Resolution: 1280 x 1024  
 Luminance: 250 cd/m<sup>2</sup>

### SPECIFICATIONS

#### Environmental Specifications

Operating Temp: 0°C to +50°C  
 Storage Temp: -20°C to +70°C  
 Humidity: 5-95% non-condensing  
 Sealing: IP 65  
 Vibration: 5-500Hz @ 0.1G accelerations  
 Shock: 15G @ 11ms pulse

#### Physical Dimensions:

Gross Weight: 18.2kgs  
 Unit Dimensions: 482.6(W) x 221(D) x 443.7(H) mm

#### Options:

Mounting Brackets  
 Touchscreen (Projected capacitive or resistive)  
 24 VDC power supply  
 Internal slim CDROM / CD-RW / DVD-ROM / DVD-RW  
 Sunlight readable display  
 Standard PC audio





# **ET45190**



## **19" INDUSTRIAL PC**

### **FEATURES**

- Sealed face plate
- Durable toughened glass
- Stylish and rugged for Industrial application
- Infra-T or Projected capacitive
- Large colour display
- Suitable for Industrial environments
- Available in Stainless Steel

### **PRODUCT DESCRIPTION**

The ET45190 is a 19" sealed stainless steel PC. It is designed for environments where plastic will not do the job. With a stylish machined aluminium face plate sealed to IP65, the ET45190 is available with a range of touch screens to suit your particular environment.

The ET45190 is designed for panel or rack mount to suit individual customer requirements.

**Due to continuing developments, specifications are subject to change without notice. No Liability is accepted for errors and omissions.**