

Limit Alarms (rotary switch adj.) AL-UNIT

PT ALARM

MODEL ALPT

MODEL & SUFFIX CODE SELECTION

MODEL _____ ALPT-□□□□

INPUT _____

1 : 0 – 110V AC
 2 : 0 – 220V AC
 5 : 0 – 150V AC
 6 : 0 – 300V AC

SETPOINT 1 OUTPUT _____


1 : Hi (coil energized at alarm)
 2 : Hi (coil de-energized at alarm)
 3 : Lo (coil energized at alarm)
 4 : Lo (coil de-energized at alarm)

SETPOINT 2 OUTPUT _____

1 : Hi (coil energized at alarm)
 2 : Hi (coil de-energized at alarm)
 3 : Lo (coil energized at alarm)
 4 : Lo (coil de-energized at alarm)

POWER INPUT _____

AC Power		DC Power
B : 100V AC	G : 200V AC	S : 12V DC
C : 110V AC	H : 220V AC	R : 24V DC
D : 115V AC	J : 240V AC	V : 48V DC
F : 120V AC		P : 110V DC

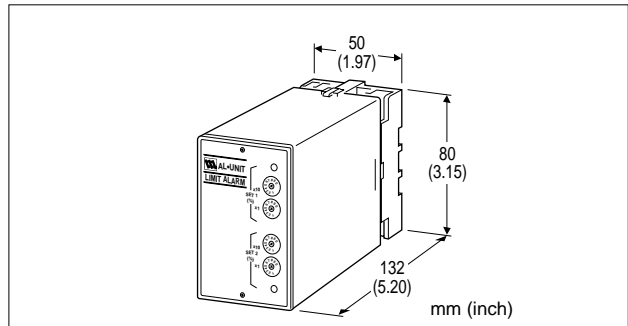

Functions & Features

- Providing SPDT relay outputs at preset AC voltage levels from a PT
- True RMS sensing
- Dual (Hi/Lo) trip
- Energized or de-energized coil at a tripped condition selectable
- Rotary switch setpoint adjustments
- Enclosed relays
- Relays can be powered 110V DC
- High-density mounting

Typical Applications

- Annunciator
- Various alarm applications

INPUT & OUTPUT

- INPUT: 0 – 110V AC, 0 – 220V AC, 0 – 150V AC, 0 – 300V AC
- Frequency: 50 or 60 Hz
- Input burden: 0.5VA maximum
- Overload capacity: 200% of rating for 1 minute, 120% continuous
- Operational range: 0 – 100% of rating

ORDERING INFORMATION


Specify code number. (e.g. ALPT-111-B)

GENERAL SPECIFICATIONS

- Construction:** plug-in
- Connection:** M3.5 screw terminals
- Housing material:** flame-resistant resin (black)
- Isolation:** input to output to power
- Input waveform:** up to 15% of 3rd harmonic content
- Setpoint adjustments:** 10-position rotary switches (front); 0 – 99% independently; 1% increments
- Hysteresis (deadband):** 0.7 – 2.5%
- Front LEDs:** red lights turn on when coils are energized.
- Power ON timer:** relays de-energized for approx. 2 seconds after power is turned on.

■OUTPUT

Alarm Trip Operation Terminal No. in parentheses

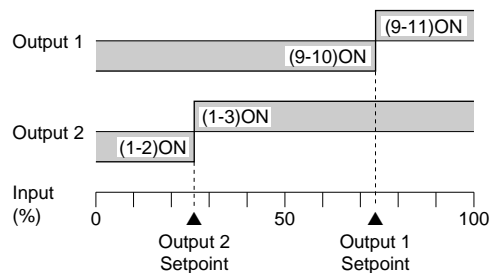

Trip Operation in Power Failure

- Output Code: 1 & 4: Terminals 1 – 2, 9 – 10 turn ON
- Output Code: 2 & 3: Terminals 1 – 3, 9 – 11 turn ON

- Relay Contact:** 120V AC @1A (cosφ=1)
 240V AC @0.5A (cosφ=1)
 30V DC @1A (resistive load)
 electrical life 5×10^5 cycles (rate 30/min.)
- Maximum switching voltage:** 380V AC or 125V DC
- Maximum switching power:** 100VA or 30W
- Minimum load:** 5V DC @10mA
- Mechanical life:** 5×10^7 cycles
 For maximum relay life with inductive loads, external protection is recommended.


PERFORMANCE in percentage of span

- Setpoint accuracy:** $\pm 0.9\%$
- Trip point repeatability:** $\pm 0.05\%$
- Temp. coefficient:** $\pm 0.015\%/^{\circ}\text{C}$ ($\pm 0.008\%/^{\circ}\text{F}$)
- Response time:** approx. 0.9 sec. (0 – 100% at 90% setpoint)
- Line voltage effect:** $\pm 0.1\%$ over voltage range
- Insulation resistance:** $\geq 100\text{M}\Omega$ with 500V DC
- Dielectric strength:** 2000V AC @1 minute (input to output 1 to output 2 to power to ground)


INSTALLATION

- Power input**
 - AC:** rating $\pm 10\%$, 50/60 ± 2 Hz, approx. 2VA
 - DC:** rating $\pm 10\%$, or 85 – 150V for 110V rating (ripple 10% p-p max.)
 approx. 2W (80mA at 24V)
- Operating temperature:** -5 to +60°C (23 to 140°F)
- Operating humidity:** 30 to 90% RH (non-condensing)
- Mounting:** surface or DIN rail
- Dimensions:** W50×H80×D132 mm (1.97"×3.15"×5.20")
 See General Spec. Sheet Figure A.
- Weight:** 370 g (0.82 lbs)
- Terminal assignment:** See General Spec. Sheet Figure B-1.

FRONT PANEL CONFIGURATION

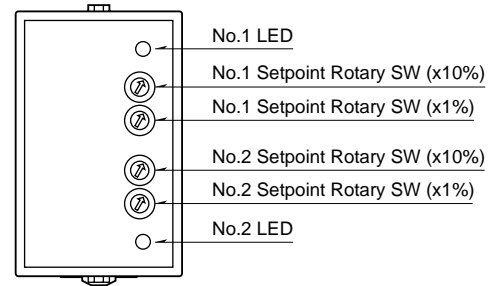


SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

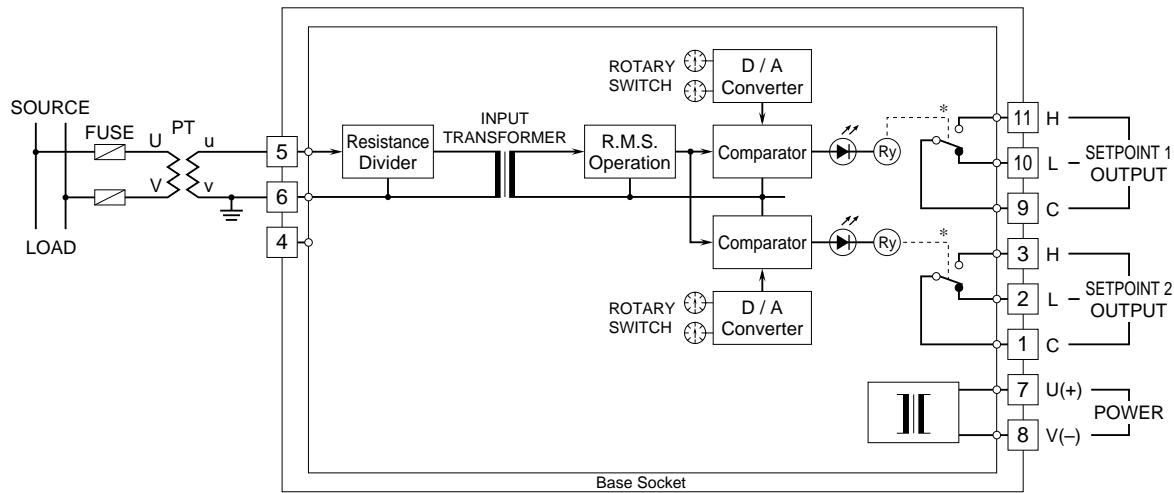


*Relay status for output codes "1" & "4", at power OFF.

■**Relay Protection**
 •**AC Powered**

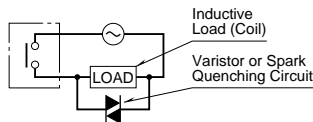

•**DC Powered**

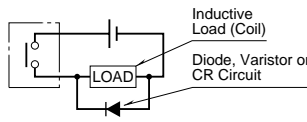

Specifications subject to change without notice.