



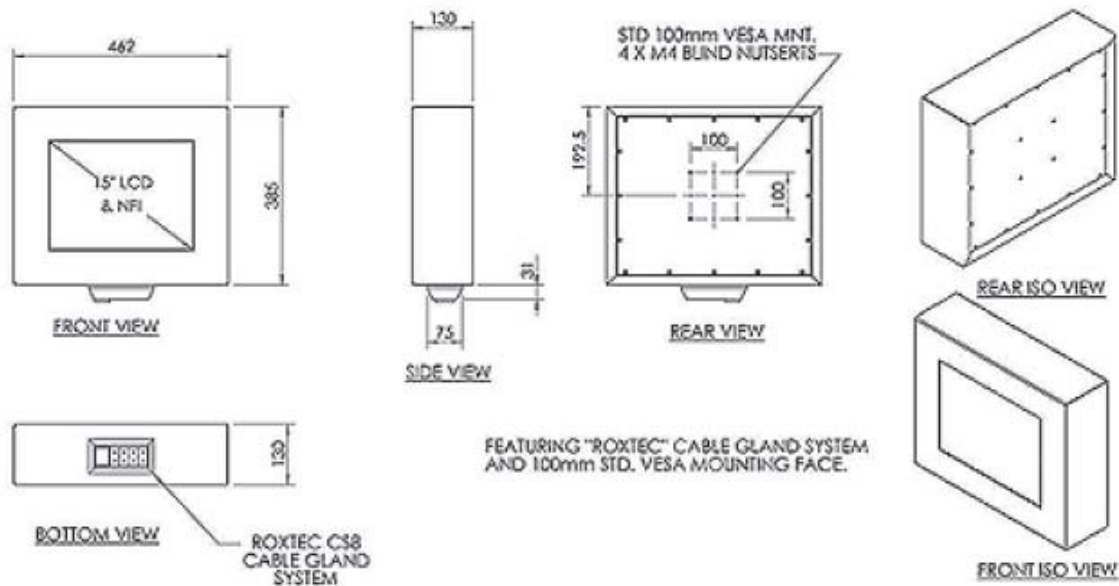
15" Fully Sealed Stainless Steel Display

FEATURES

Fully sealed to IP66
Stainless Steel construction
Optional Touch screen
Vesa Mounting
ROXTEC Gland System
Suitable for Food and Pharmaceutical industries

PRODUCT DESCRIPTION

The FT2055 is a 15" fully sealed stainless steel display. It is designed specifically for the food industry. All metal construction and IP66 sealing enable it to be used in food production and preparation areas. 1024 x 768 resolution makes it ideal for HMI applications.

**SPECIFICATIONS****TFT Specification:**

Display size:	15 inches
Maximum resolution:	1024 x 768 XGA
Type:	Colour Active Matrix
Colour depth:	16.7m colours (RGB 8-bit)
Contrast ratio (typical):	300:1
Viewing angle (typical):	H + 70°, V + 55°
Response time:	25ms typ. (Tr + Tf)
Brightness (typical):	250 cd/m ²

Physical Dimensions:

Unit Dimensions:	462(W) x 130(D) x 385(H) mm
Gross Weight:	14.45kg

Power supply:

Power:	Standard connector
Input range:	100 to 240 VAC, 47 to 63Hz, 200W max DC option available

Typical Power

Consumption:	Operating: 65W, Peak: 75W
--------------	---------------------------

SPECIFICATIONS**Environmental Specifications:**

Operating Temperature:	0°C to +55°C
Storage Temperature:	-20°C to +60°C
Vibration:	5 - 500Hz, 0.1G acceleration
Shock:	15G, 11mS Half Sine
Humidity:	5-95% non condensing

Input:

Video Connector:	Analog RGB Sync on green
------------------	--------------------------

Construction:

Sealing:	Fully sealed to IP66
Enclosure:	Stainless Steel / Steel

Options:

High Bright & Sunlight readable screens
Touch Screen
DVI & Composite
Mounting brackets

**Due to continuing developments, specifications are subject to change without notice.
No Liability is accepted for errors and omissions.**